

CITS3007 Secure Coding

Secure software development

Unit coordinator: Arran Stewart

Highlights

- ▶ Risk management
- ▶ Secure SDLC (software development lifecycle)
- ▶ Design processes
- ▶ Design principles
- ▶ Security testing

Risk management

Security is about managing risks.

No system can be *perfectly* secure (except perhaps one that is never actually used).

But we can try to ensure that we bring the *risk* of serious security problems occurring down to a tolerable level.

Risk management

Identifying risks:

- ▶ Can reduce to “filling in forms”
- ▶ But *proper* risk identification requires creativity, brainstorming, communication with stakeholders.
- ▶ Needs to overcome positivity bias/groupthink
 - ▶ **Pre-mortem**: Imagine we're in the future and the system has *already* failed catastrophically. Ask yourselves, how did this arise?

Risk management

- ▶ Avoid/resolve the risk: completely eliminate it
- ▶ Mitigate the risk: reduce the likelihood or impact
- ▶ Transfer the risk: assign or move the risk to a third-party (e.g. outsource, insure)
- ▶ Accept the risk: acknowledge the risk, and decide not to resolve, transfer or mitigate


Incorporating security

Approaching security as something you can simply “add on” to existing systems or processes as an extra phase or step is doomed to failure.

The aim should be to *incorporate* security into existing processes, at all stages of the software development life cycle:

- ▶ analysis/requirements elicitation
- ▶ design
- ▶ implementation and testing
- ▶ maintenance/operation
- ▶ disposal

Incorporating security

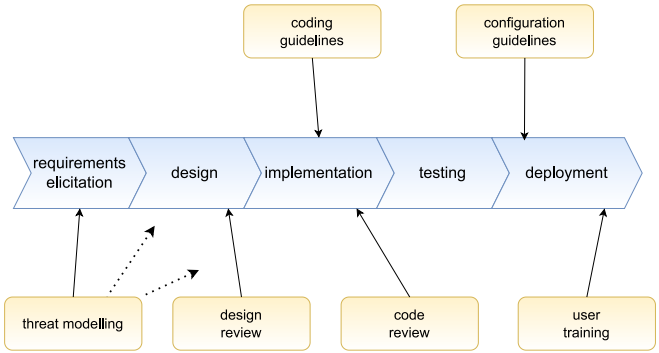

Incorporating security

Most of these elements of secure development assume you're already applying (non-security) best practices – version control, testing, etc.

If your other processes are bad, then adding on (e.g.) “secure testing” isn't going to make them any better.

Incorporating security

Requirements stage:

- ▶ Identify security goals
- ▶ Identify essential threats

Incorporating security

Design stage:

- ▶ Risk analysis
- ▶ Plan for secure implementation and secure testing
- ▶ Design review

Incorporating security

Implementation/testing stage:

- ▶ Code review
- ▶ Risk analysis for libraries used
- ▶ Security testing
 - ▶ (Possibly) penetration testing

Incorporating security

Maintenance/operation:

- ▶ Handling reported vulnerabilities
- ▶ Regression testing

Incorporating security

Disposal:

- ▶ If the product is being disposed of – what happens to any sensitive data?

Threat modeling

- ▶ Is conducted in the *context* of wanting to protect something of value
- ▶ Process whereby potential threats (e.g. vulnerabilities) can be identified, enumerated, and prioritized
- ▶ The process of then understanding and communicating those threats (and their mitigations)

Threat modeling

Identify essential threats to a system's security.

For example:

- ▶ Do we transmit customer data between client and server?
Then one threat is that it could be intercepted.
- ▶ Do we store sensitive customer data in a database? Then one threat is that confidentiality of the database could be breached.

Threat modeling

STRIDE is technically just a taxonomy (plus mnemonic) for threats, developed by Praerit Garg and Loren Kohnfelder (textbook author) at Microsoft.

But used as part of threat modelling, for identifying and reasoning about threats to a system.

The name is a mnemonic for categories of threats:

- ▶ **Spoofing:** attacker pretends to be someone else
- ▶ **Tampering:** attacker alters data or settings
- ▶ **Repudiation:** user can deny making attack
- ▶ **Information disclosure:** loss of personal info
- ▶ **Denial of service:** preventing proper site operation
- ▶ **Elevation of privilege:** user gains power of root use

Threat modeling

Each of these categories of threats violates some security property we want systems to have

Spoofing

Violates *authenticity*

Tampering

Violates *integrity*

Repudiation

Violates *non-repudiation*

Information disclosure

Violates *confidentiality*

Denial of service

Violates *availability*

Elevation of privilege

Violates *authorization*

Threat modeling with STRIDE

STRIDE approach uses a *model* of the system to identify

- ▶ *assets* (valuable data and resources) that need protection
- ▶ *flows* of data through the system
- ▶ *attack surfaces* (places an attack could originate)
- ▶ *trust boundaries* (the borders between more-trusted and less-trusted parts of the system)

Threat modeling with STRIDE

- ▶ For each flow / transformation / storage:
 - ▶ Are there vulnerabilities to **STRIDE**?
 - ▶ Can this route be attacked? What is the attack surface?
- ▶ Design mitigations/countermeasures

Threat modeling with STRIDE

STRIDE is intended to be *developer*-friendly

- ▶ doesn't assume we know about the end-user's risk appetite
- ▶ doesn't emphasise risk/impact assessment (developers may not be able to do so)

More on a suggested process incorporating STRIDE later.





Some principles of secure software design

- ▶ Redundancy
 - ▶ Defence in depth
- ▶ Exposure minimization
 - ▶ Principle of least privilege
 - ▶ Separation of Privilege
 - ▶ Secure by default
- ▶ Economy of design

Saltzer and Schroeder

Saltzer and Schroeder (1975)'s classic principles:¹

- ▶ **Economy of mechanism:** keep it simple
- ▶ **Fail-safe defaults:** the default configuration should be secure
- ▶ **Complete mediation:** check authorization, every time
- ▶ **Open design:** assume attackers get the source and spec
- ▶ **Separation of privilege:** split up responsibilities
- ▶ **Least privilege:** no more privilege than needed
- ▶ **Least common mechanism:** beware shared resources
- ▶ **Psychological acceptability:** are security ops usable?

¹Saltzer, Jerome, and Michael D. Schroeder. "The protection of information in computer systems." *Proceedings of the IEEE* 63.9 (1975): 1278-1308.    

Defence in depth

Combine independent layers of protection.

- ▶ Then, for something to be insecure/exposed, they *all* need to fail.

Ensure the weakest link is secured.

Defence in depth

Example:

- ▶ Sandboxes/VMs
- ▶ Run your student assignment-checking code in a Docker sandbox, as a non-root user, in a VM, in Singapore.
 - ▶ Even if someone compromises a web-server program, there's limited information they have access to.

Principle of least privilege

Every [component] and every user should operate using the least amount of privilege necessary to complete the job.¹

– *Jerome Saltzer*

- ▶ Functions, programs, processes etc. should be able to access only the information and resources they they need to do their job
- ▶ e.g. If they don't need "write" access, they shouldn't have it

¹Saltzer, Jerome H. (1974). "Protection and the control of information sharing in MULTICS".

Separation of Privilege

A sort of corollary of the Principle of Least Privilege.

- ▶ Where possible, split responsibilities between components/processes/systems, so that no one of them has too much power.
- ▶ The patterns we looked at for setuid programs are examples of this (e.g. splitting into client/server)

Separation of Privilege

- ▶ Separate the system into independent modules
- ▶ Limit interaction between modules

Secure by default

Give things secure and/or safe values by default.

- ▶ Even if a user/developer does *no* customization, the system shouldn't be unsafe or insecure

Economy of design

Keep things as simple as they possibly can be (but no simpler).¹
– *Einstein? William of Ockham? Anonymous?*

- ▶ The simpler the design, the easier it is to analyse and the fewer places bugs can lurk
- ▶ This doesn't mean a more complex design is worse, overall – just that it needs to have countervailing advantages that offset the additional complexity.

¹<https://quoteinvestigator.com/2011/05/13/einstein-simple/>

Economy of design

Saltzer and Schroeder's original formulation says: "Economy of mechanism: Keep the design as simple and small as possible".

The principle is also sometimes called "Economy of design".

Economy of design

Minimize or hide “moving parts”.



Michael Feathers
@mfeathers

OO makes code understandable by encapsulating moving parts. FP makes code understandable by minimizing moving parts.

11:27 PM · Nov 3, 2010 · TweetDeck

– Michael Feathers,
<https://twitter.com/mfeathers/status/29581296216>

- ▶ Keep exposed interfaces as small as possible (information hiding)
- ▶ Keep data as immutable as possible

Economy of design examples

Can you think of any examples (or counterexamples) of economy of design in the design of objects and systems of daily life?

- ▶ Are there objects or systems which are as simple as possible, and benefit from this?
- ▶ Are there objects or systems which are more complex than needs be, for no real advantage?

Complete mediation

This principle says that whenever a resource is accessed, we should validate that the principal (user) has authorisation to access the resource.

Can you think of a way in which traditional Unix systems do *not* satisfy this principle? (Hint: think of file permissions.)

Security reviews

The software development process should incorporate *reviews*.

- ▶ A *security design review* involves someone assessing and critiquing the software design for possible problems.
- ▶ A *security code review* involves the same, but for code that is being submitted / amended.

Security reviews

When to conduct secure design reviews?

Once the design is reasonably stable.

Kohnfelder's advice is to separate *security* design reviews from other reviews (e.g. of functionality).

Security reviews

If a security review is to be useful, it has to be done carefully.

Reviewers need to

- ▶ study the design and supporting documents
- ▶ clarify where necessary and investigate further
- ▶ identify the *highest-risk*, most security-critical parts of the system to give special attention to
- ▶ write up and document their findings and recommendations

The organization needs to

- ▶ have a process in place to ensure reviewing findings and recommendations are followed up on and signed off.

Code style

Consistent code style makes it easier to conduct code *reviews*.

Human reviewers shouldn't spend their time checking for issues that can be checked mechanically.

Code reviews

Someone other than the original developer should always sign off on code that's checked into version control/ merged with main branches.

Empirically, code reviews are highly effective at preventing bugs from getting into a software product.

Static and dynamic analysis

In previous lectures, we've looked at how automatic static and dynamic analysis can be incorporated.

Don't "roll your own" crypto

Unless you have a very good understanding of cryptography, it's better to make use of existing cryptography libraries.

It's very easy to make a mistake in implementation that can render the cryptography worthless.

Security testing

